


# EO Mini Pro 3


## Cleenergy EV Platform Onboarding Guide

- Before powering up the charger, **photograph or take note of the WIFI and portal login details** on the label inside the charger or as provided in the charger's documentation.
- **Power up the charger and wait for the LED to turn from White to Blue.** At this point the charger's WIFI hotspot will become available and will display as the following format: eo-#####
- **Select the security key option to enter the password.** Enter the **WIFI hotspot password** as described on the charger label. Please note: This process will vary from device to device.
- **Navigate to the EO charger portal** by entering **10.10.10.1** into the navigation bar of the web browser on your device.
- Once the portal has loaded, **login using the details provided** on the charger label.



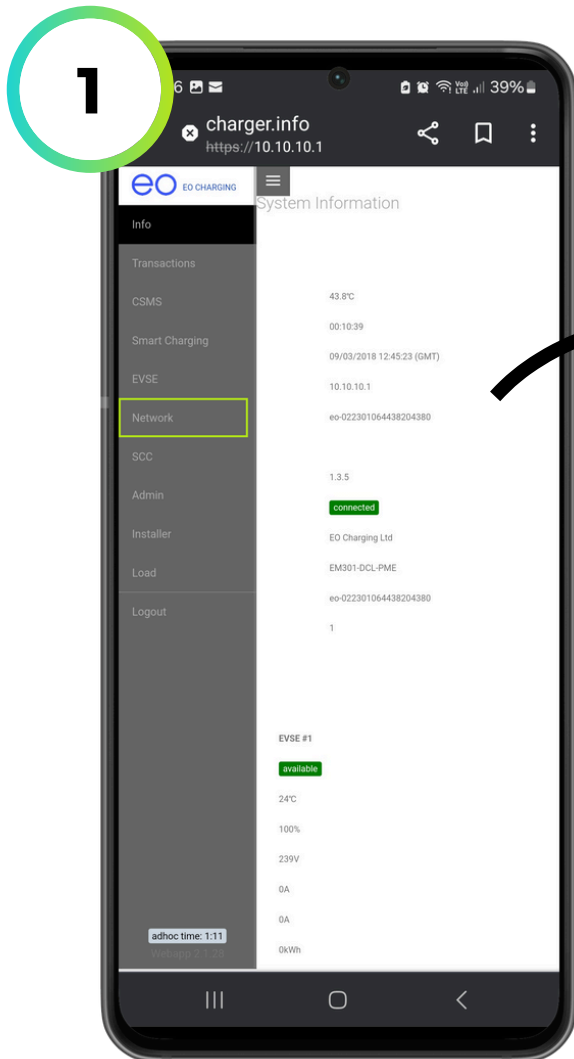


1. On the home screen, open the drop-down menu and select **Network**.

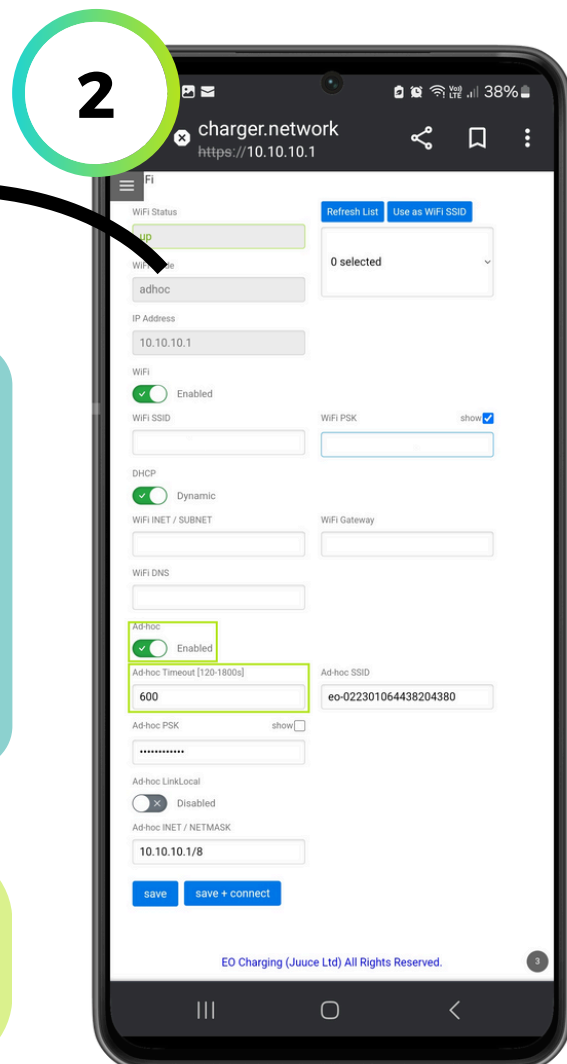


2. Configure the network settings as required for your installation using the relevant credentials. If onboarding using the Clenergy EV Engineer app, set the **Ad Hoc Timeout to 120 seconds** to avoid issues when rebooting the charge point. Select **Save**.

**Please note:** It is recommended that the **Ad Hoc Wi-Fi** remains enabled in order to access the charger easily if required in the future.

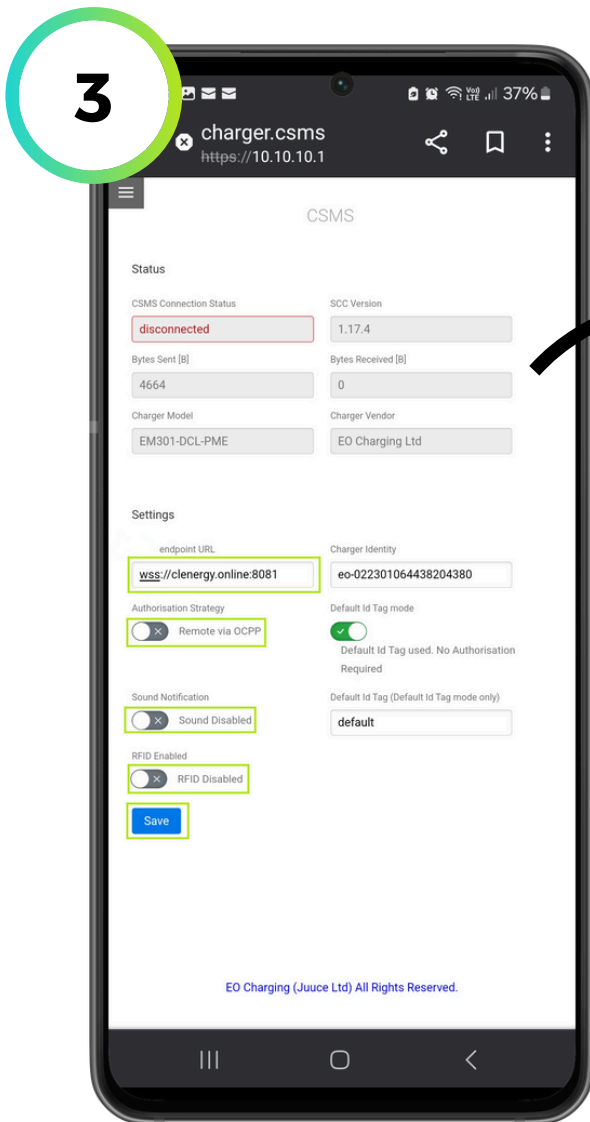

Go to the CSMS screen via the side menu.  
Enter `wss://clenergy.online:8081` in the CSMS Server Address field.  
Enable Default Id Tag Mode and disable all other options.  
Select Save.

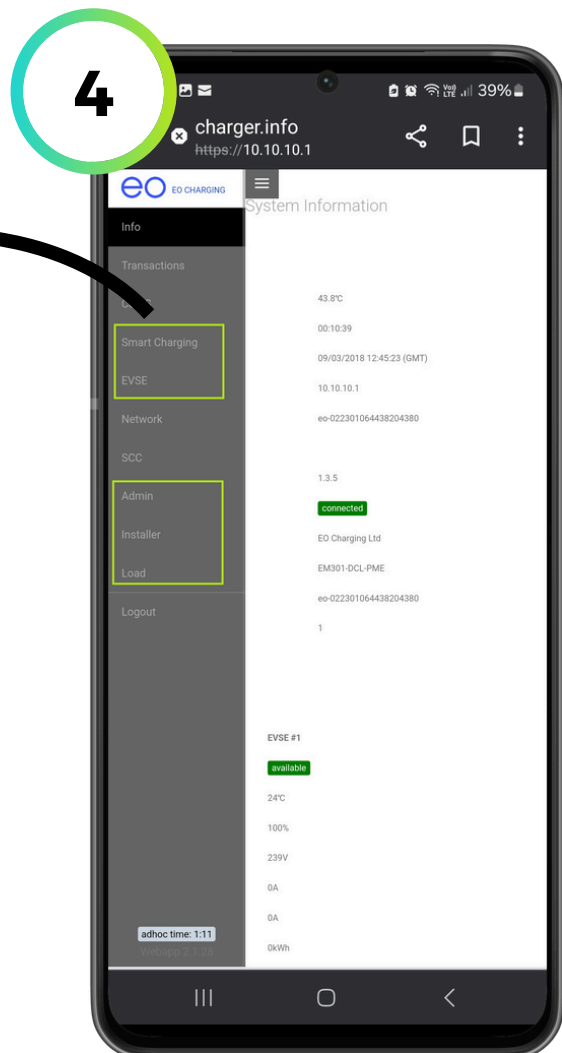

Access the relevant sections via the side menu to **update firmware** and **configure date/time and electrical settings** as required.  
Power cycle the charger to complete the process.